


SPECIAL WORKS


All edges listed can be supplied in curved version with minimum bend radius of 500 mm.

Figure "A" | For edges type "B1NC" - "B1NC-AG" - "B2C" - "B2C-AG"

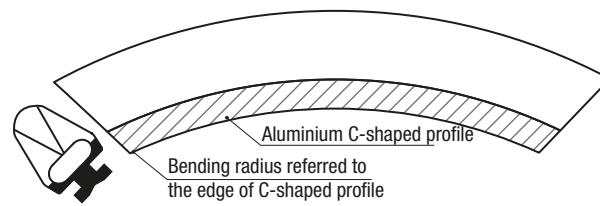

Side view

Figure "B" | For edges "B1NC" - "B1NC-AG" - "B2C" - "B2C-AG" - "B0C" - "B0C-AG"

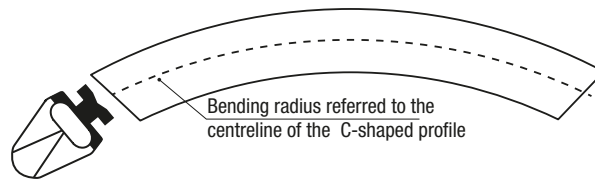

Top view

Attention: Figure "A" and Figure "B" not executable together on the same profile